

INNOVALITE SOLAR POWERED LIGHT # 9018



⚠️ WARNING

- ◆ Risk of drowning by entanglement; secure the power cord supplied as per instructions.


⚠️ CAUTION

- ◆ The lighting fixture may be damaged if subjected to freezing weather.
- ◆ Store in a dry location unexposed to winter conditions.
- ◆ Do not submerge the solar panel, the product could be damaged.

TABLE OF CONTENTS


- A) Assembly of the light fixture.
- B-D) Installation on the pool wall.
- E) Securing the power cord outside the pool.
- F) Securing the power cord on the inside of pool.
(Metal pool)
- G) User guide
- H) Winterizing

TOOLS REQUIRED (Not included)

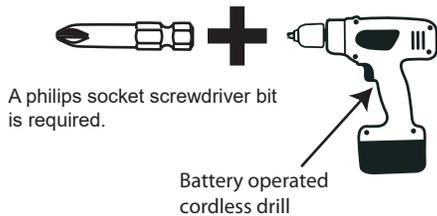


A ASSEMBLY OF THE LIGHT FIXTURE

- 1) Insert the light housing into the lower post.
- 2) Slide and clip the T-post into the lower post.
- 3) Insert the straps into the T-post, making sure that the thick end of the straps is kept on the backside of the T-post.
- 4) Route the power cord into the chicane on the back of the post, and secure the upper end of the cable with the built-in cable clip.

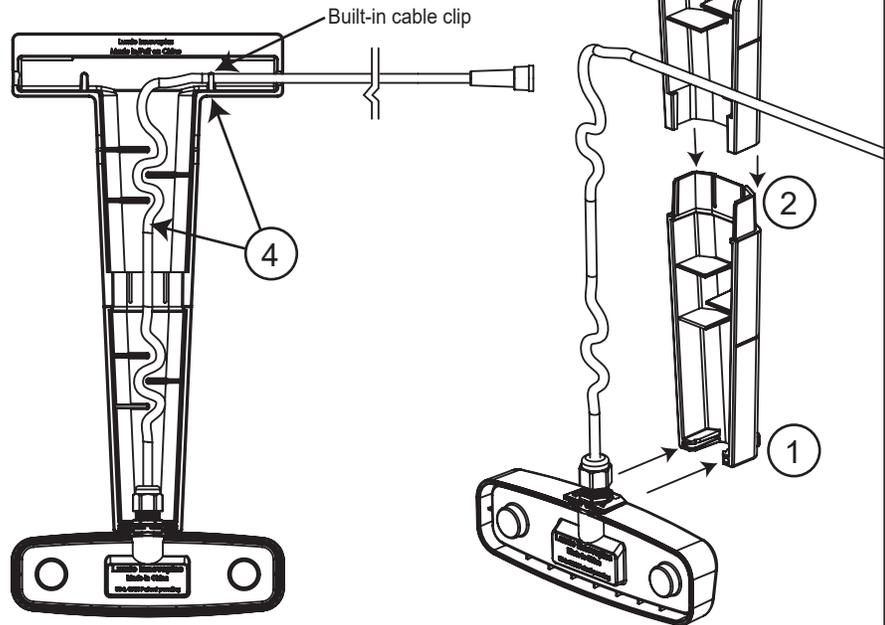

REQUIRED FOR SKU # 9018 (included)




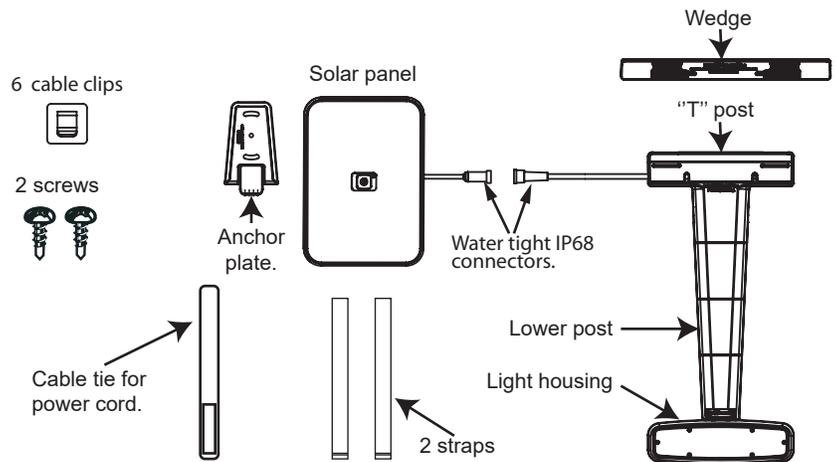


LIMITED WARRANTY

90 days on manufacturing defects.
Replacement only.

B INSTALLATION ON THE POOL WALL

1) Tread the power cord under the top seat of the pool over the wall stabilizer. In some cases the top seat of the pool will have to be slightly flexed upward to allow the connector to pass. No need to take apart the pool top seat.

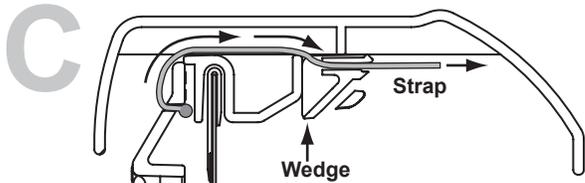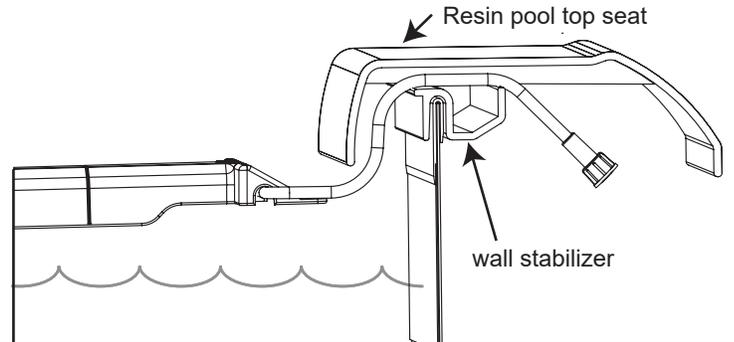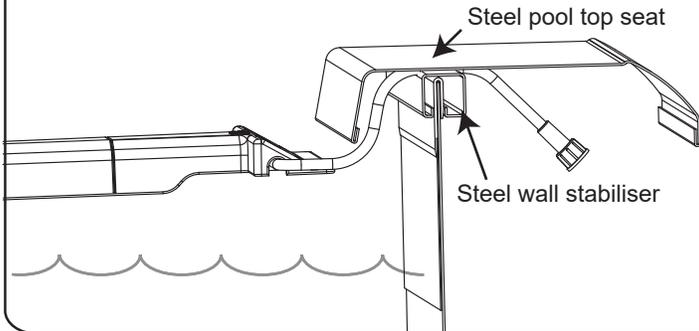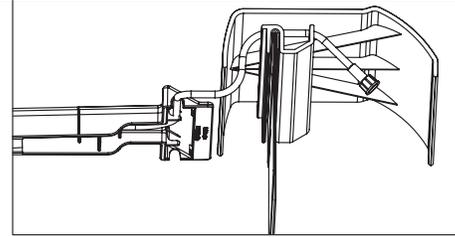


C

1) Place the light fixture on the pool wall. The light fixture will stick to the wall with the help of the built-in magnets.

2) Tread the two straps over the wall stabilizer and insert the straps into two slots in the wedge.

3) Tighten and lock the two straps as shown below.


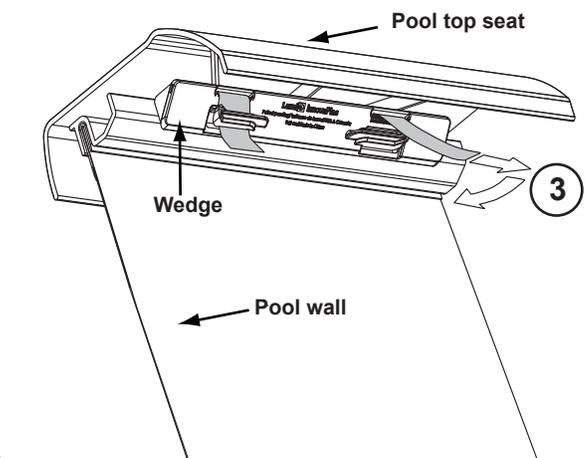


D

1) Identify the best location to install the solar panel. The panel should be pointing toward the sun at noon. Avoid major obstacles between the sun and the panel. The panel should be exposed to a light source for a minimum duration of 6 hours to perform.




2) Fasten the anchor plate to the pool top seat with the screws provided, and snap in place.

3) Connect the cable to the panel, make sure that the connector knurled ring is screwed tight to ensure water resistance.

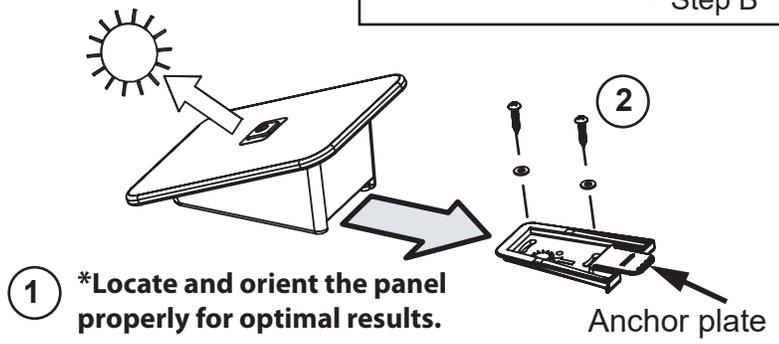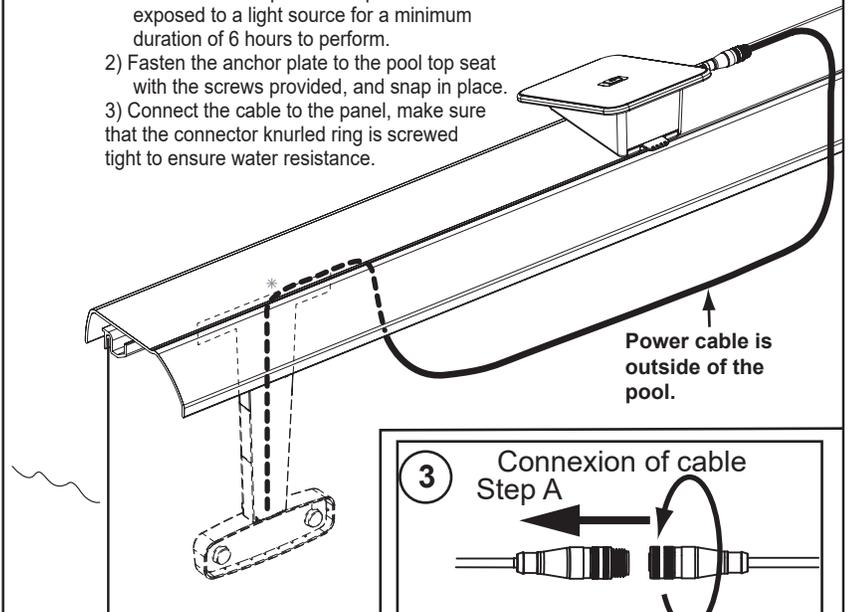



E SECURING THE POWER CORD OUTSIDE THE POOL

- 1) Secure the power cable with the cable clips supplied. Make sure that the cable does not impede the movement of bathers. Risk of entanglement!
- 2) Roll the excess cable, secure it with the cable strap (included) and stow it on the dry side of the pool.

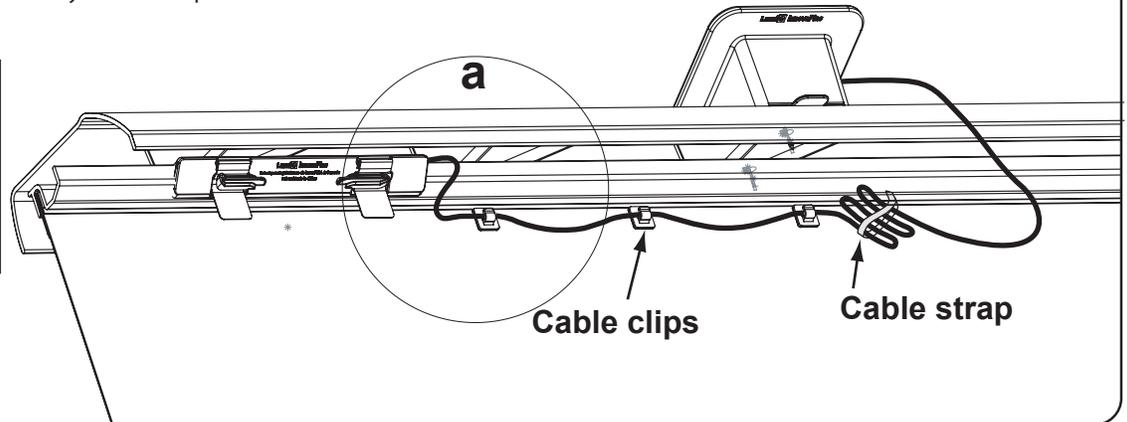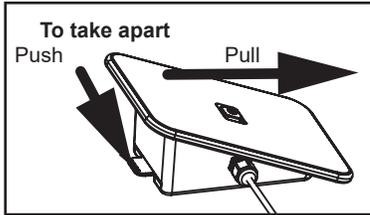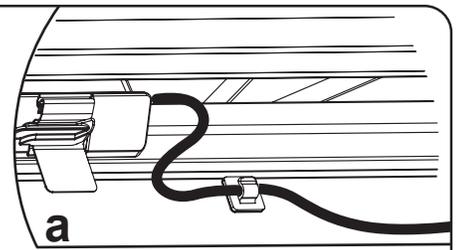

F SECURING THE POWER CORD INSIDE OF POOL (Metal pool)

- 1) Some metal pools' top seat design might not provide the necessary clearance to tread the power cable over the wall stabilizer. The following instructions below allow the power cable to be routed under the top seat on the wet side of the pool.
- 2) As mentioned in step E, use the cord strap to safely stow the excess on the dry side of the pool.

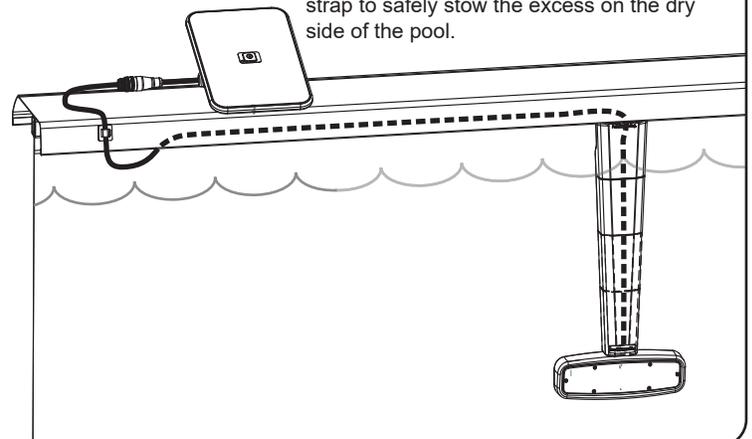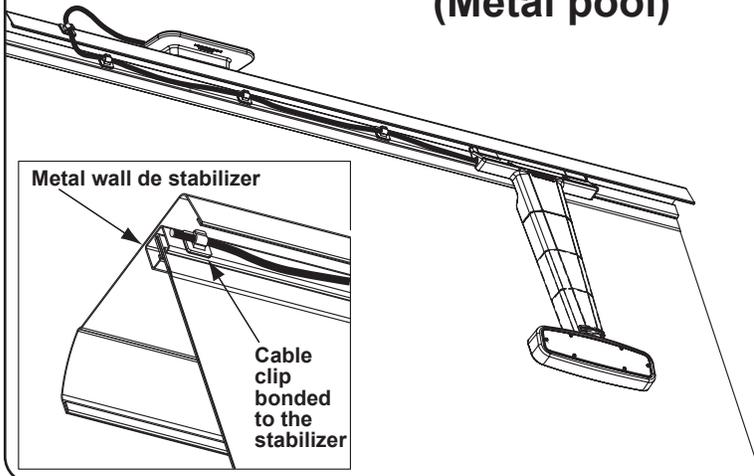

G User guide

Press on the switch for 4 seconds to turn on or off the light fixture.
 A built in countdown timer will turn off the light after 2 hours.
 The light will last for 3 hours on a fully charged solar panel.
 The light fixture is not designed to turn itself on at sundown.

H WINTERIZING

- 1) Disconnect the solar panel.
- 2) Unlock the solar panel from the mounting plate and slide the panel out as shown.
- 3) Pull the light assembly out of the water for storage in a dry location.

