



ROYAL ENTRANCE II WITH DECK

Contents of the Accessories box #2020-HRK

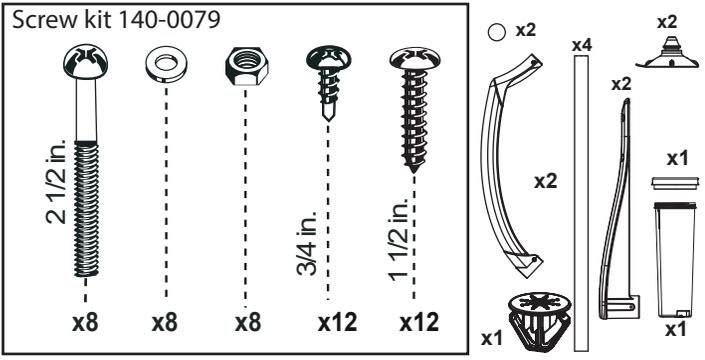

Step Shell

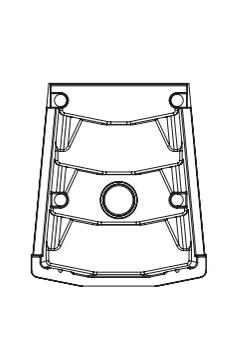

Required tools (not included)



Sand (not included)



⚠ WARNING

- ▶ Do not jump nor dive from the step; you can be permanently injured.
- ▶ To prevent electrocution use only BATTERY operated tools to assemble the step.
- ▶ To prevent drowning or injuries, do not use the step outside the pool or to access the pool. Fasten the step to the pool deck.
- ▶ For 48,52,54" above-ground pool only.
- ▶ The step must be installed per manufacturer's instructions.
- ▶ Maximum capacity is 300 lbs /159kg

⚠ Caution

- ▶ Use of corrosive cleaning solutions can damage the step components.
- ▶ Remove the step from water when temperatures drop below freezing.
- ▶ To prevent damaging the step, never lift the step by its handrails.
- ▶ The manufacturer is not responsible for damages or injuries caused by improper installation or use of the product.
- ▶ Failing to install the Step Cup™ will greatly reduce the steadiness of the step and will void the manufacturer warranty.
- ▶ To prevent pool liner puncture, install the Step Cup™ provided.

A

1) Insert the two Step Cups in the holes under the step

Light cap

x2

A1) Insert half of the Step Cup mushroom ring in the hole, at a 45 degree angle.

A2) With a flat screwdriver, compress the Step Cup mushroom ring while pushing it into the hole.

A3) Twist the Step Cup to ensure that the mushroom ring has entirely cleared the wall thickness. If it has, the suction cup should rotate freely.

2) Align the light cover's two alignment rods into the small holes at the top of the larger hole. Insert the light cover by pressing firmly.

CAUTION

Failing to install the Step Cup™ system will greatly reduce the steadiness of the step and will void the manufacturer warranty.



* View step cups installation tips on YouTube: <https://www.youtube.com/watch?v=W5RH1VNxpu0>

MANUFACTURER WARRANTY

**1 year on pool step.
1 year on hardware.**



2257 route 139
Drummondville, Québec
J2A 2G2

WWW.INNOVAPLAS.COM


REV. 2025/12/02

PN:

PG:1

ROYAL ENTRANCE II WITH DECK



B

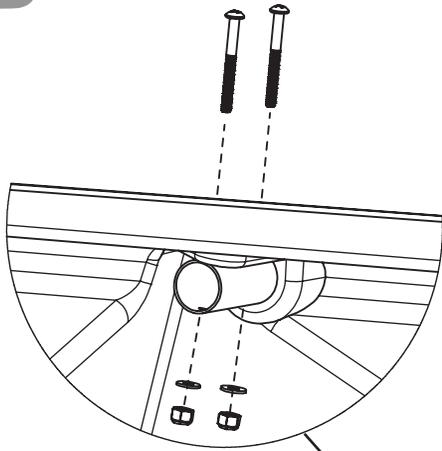

1) Place the step on its side and insert the posts into the holes in the step. Fasten each post with the long bolts making sure the locknuts and flat washers are inside the steps.

2) Insert the deck brackets into the rear post. Do not fasten the deck bracket at this point.

3) Install the handrails with the short screws provided. Insert the two handrail encaps before fastening the handrails.

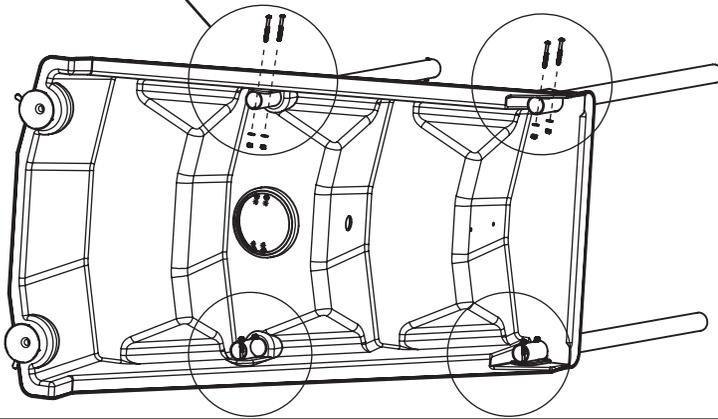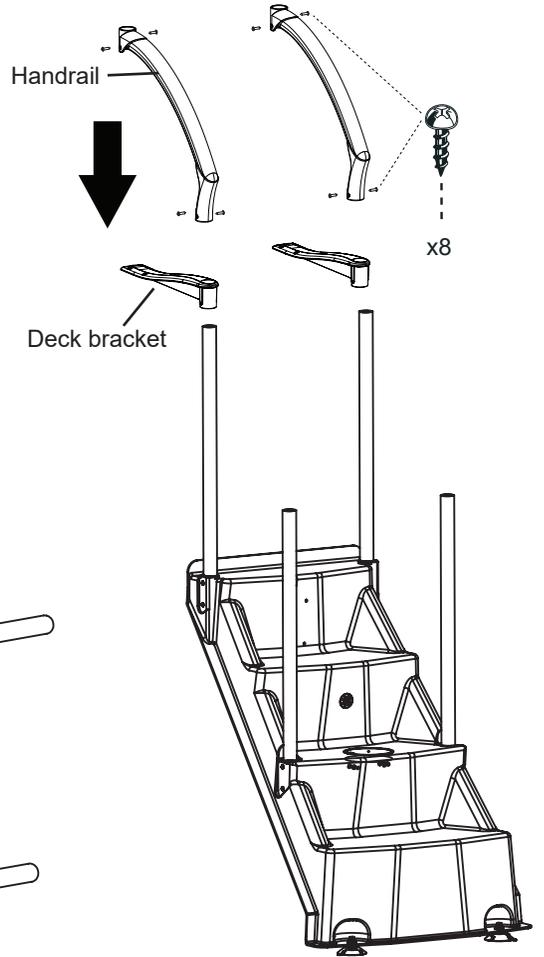

C

1) Fill the ballast with sand. The approximate weight should be 15 lbs.




2) Screw the lid in place and align the cover ribs with the holes in the ballast base.

3) Fasten the cover to the ballast base with the four screws provided.

4) Slowly submerge the step into the pool. Make sure you do not damage the pool liner in the process.


5) Slide the deck supports to the height of the deck.

6) Drop the ballast in the step hole.

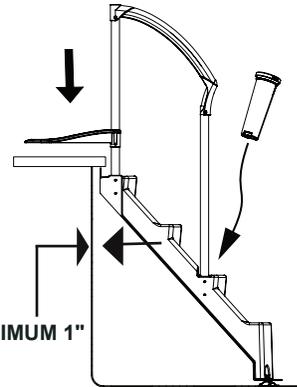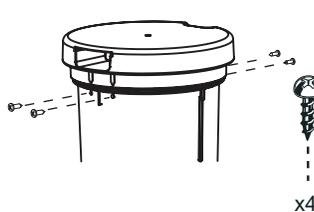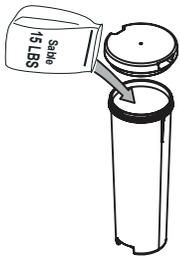

To prevent pool liner puncture, keep a minimum 1" gap between the pool liner and the rear underside of the step.

D

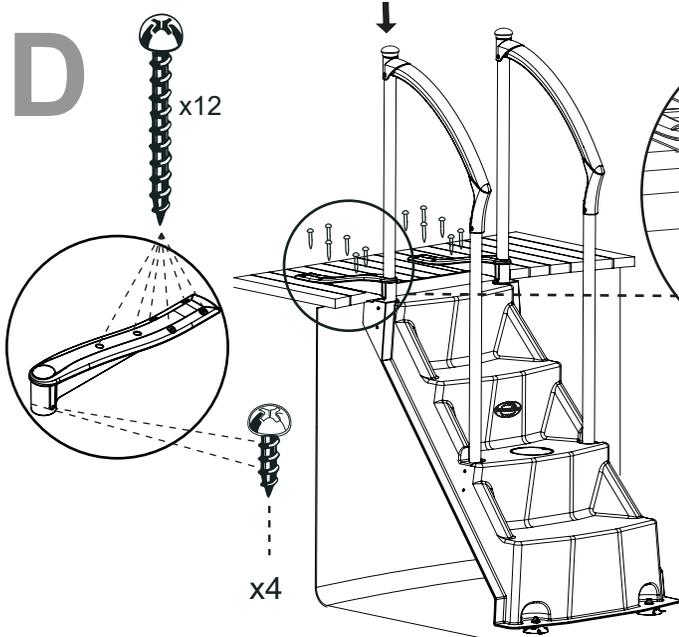

1) Affix the deck supports to the deck with the screws supplied.

2) Install the post covers on the handrails.

3) Pull the deck supports (already fixed to the deck) upwards to create a spring effect on the step.

4) Fasten the supports to the rear posts while pushing the entire step downwards.



For the installation of the optional safety fence to prevent swimming behind the step, visit our website: <http://innovaplas.com/instructions>

MANUFACTURER WARRANTY

**1 year on pool step.
1 year on hardware.**