
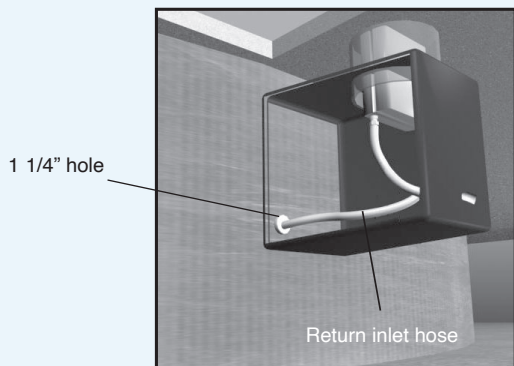


INSTRUCTIONS FOR THE AQUA LEVEL SYSTEM IN-GROUND SWIMMING POOL

1- SETTING THE CASING

- Place the casing under the footpath the closest to water supply source;
- Adjust the access tube to the casing;
- Pass a 1 ¼" pipe through the hole on the back of the casing and lead it to the outside of the footpath. It will serve as access to the casing;
- Plug a hose to the water supply and insert it into the pipe until it reaches the casing.


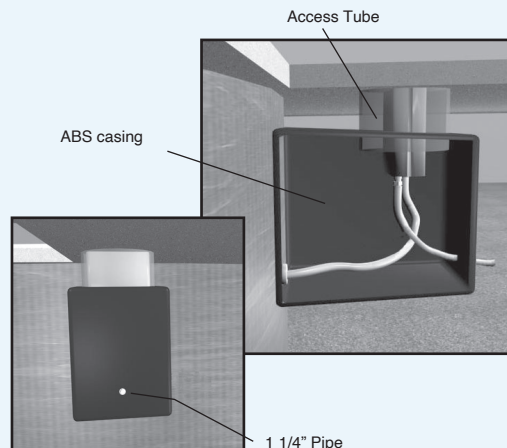


2- SETTING THE RETURN INLET

- Drill a 1 ¼" hole in the wall of the pool.
Attention : the hole must be accessible from the inside of the casing;
- Install the return inlet with the gasket;
- Important: The cap must be screwed on to the return inlet for initial adjustment

3- HOOK-UP

- Place the hose between the tank and the return inlet and tight each end with the clamps;
- Hook-up the water inlet to the other hole of the tank;
- Place the tank inside the access tube and fix it with the 1" screws and spacers.

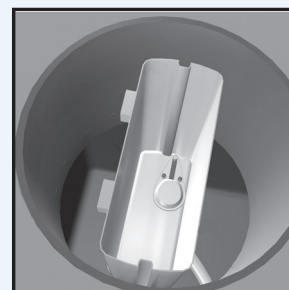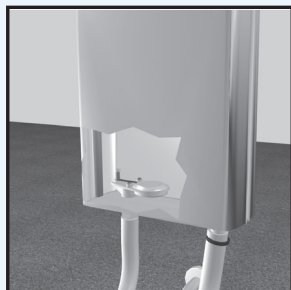

Having any questions ? You may contact our service department by phone or email

1 800 363-2396 • centredappel@lumi-o.com




INSTRUCTIONS FOR THE AQUA LEVEL SYSTEM IN-GROUND SWIMMING POOL

4- ADJUSTMENT AND CHECK-UP

Important: Before opening the water source, unscrew the nut to its maximum and make sure that the cap is still screwed on the return inlet.

- Open the water source and screw the nut until the desired water level is attained;
- When the right water level in the tank is attained, make sure that it does not overflow and that the valve works properly;
- In case of overflowing, empty the tank, unscrew the nut to its maximum and start over again.

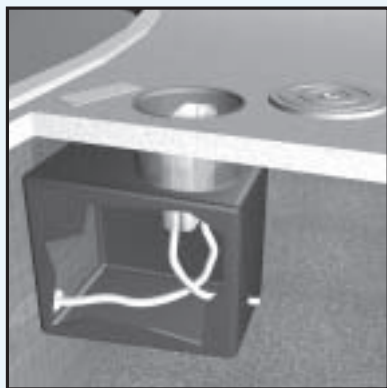

5- FINAL STEPS

- When the right adjustment is attained, put the cover on the tank;
- Remove the cap from the return inlet and screw it on the cover;
- Put the other cover on the access tube of the casing.

NOTE: The small cap is very useful for future adjustments.

CLOSING PROCEDURES

- Put the cap on the return inlet;
- Turn down the water source;
- Remove the tank by unscrewing the clamp under it;
- Make sure that there is no water left in the tank to prevent the valve from freezing;
- Store in a freeze-free place.

THE AQUA LEVEL INCLUDES:

Tank #7025
Valve (4 pcs) #7030
Return inlet #7010
Return inlet nut #7028
Access Tube #2015
Clamps (2) #7053
Spacers (2) #0914
Valve plug-in #7042

Tank Cover #7020
Hose #7049
Cap #7015
ABS casing #2010
Access Tube Cover #2020
1 ¼" screws (2) #1062
Gasket #7011

Having any questions ? You may contact our service department by phone or email

1 800 363-2396 • centredappel@lumi-o.com